

VENUS ULTIMATE


VNU 1-10kVA



DSP TRUE ONLINE DOUBLE CONVERSION UPS

Features

- True Online Double Conversion Pure Sine Wave UPS
- Advanced DSP digital controlled and IGBT technology
- High input Power Factor Correction (PFC>0.99)
- Output Pure Sine Wave less than 3% (THDv)
- Output voltage 220Vac +/-1% (200, 208, 220, 230, 240V)
- Wide Input Voltage Range 120 - 300Vac
- High Inverter Efficiency (approx. ≥90%)
- Zero Transfer Time with Static Transfer Switch (SCR)
- Self Diagnosis at UPS start up or Manual Self Test
- Advanced Battery Management (ABM)
- Battery Capacity & Remaining Backup Time
- EMI/RFI and Power line noise protection
- Surge, Lightning, Spike, Blackout, Brownout
- Overload and Short circuit Protection
- USB Port with UPSilon 2000 Monitoring
- External Battery Unit (Option: Battery charger)
- SNMP / HTTP Internet Network / AS400 (Option)
- Parallel Redundancy N+X 5-10kVA (Option)
- Maintenance Bypass switch 5-10kVA
- EPO: Emergency Power Off / ECO: Economy (Option)
- TIS 1291 Part 1-2553, Part 2-2553, Part 3-2555 : C1
- CE : IEC62040-1, -2, -3, IEC55022, IEC61000
- ISO9001 / ISO14001 : 2015 Certified Manufacturer

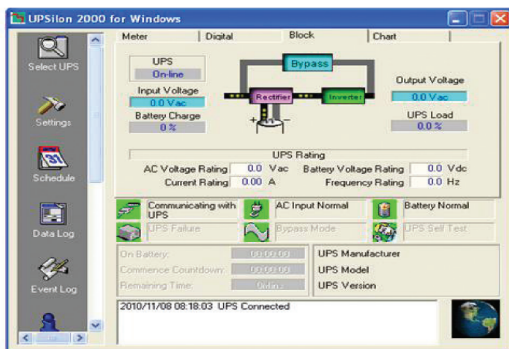


UPSilon 2000 UPS Monitoring software

LCD DISPLAY REAL TIME STATUS



1. LCD Display
2. On-Line Mode
3. Battery Mode
4. Output
5. Bypass Mode
6. Function Switch
7. ON/OFF Switch

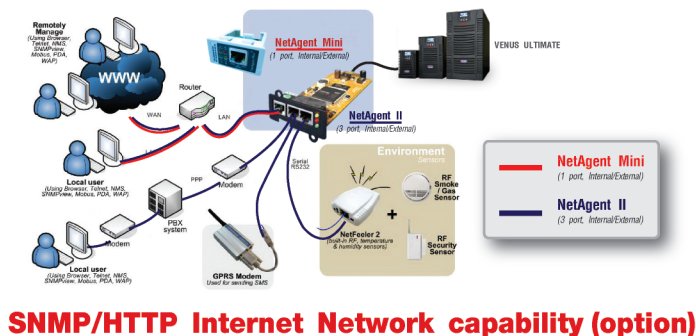

SNMP/HTTP Internet Network capability (option)

Chuphotic UPS have range from 500VA to 1000KVA is also widely used to protect electronic equipments such as computer, server, networks, PABX, CCTV, telecommunications, medical, scientific equipment and industrial, etc. from blackout, browout, surge, spike, harmonic, noise and frequency drift.



ยีนดับริการ



ส่งทั่วไทย
ด้วยระบบขนส่งที่ทันสมัย



02-026-3361-115



www.saeng.com



saengonline



@saeng

VENUS ULTIMATE

DSP TRUE ONLINE DOUBLE CONVERSION UPS



SPECIFICATION

Model	Standard UPS	VNU1000	VNU2000E	VNU2000	VNU3000	VNU5K	VNU6K	VNU10K
	Long backup UPS	VNU1000L	VNU2000EL	VNU2000L	VNU3000L	VNU5KL	VNU6KL	VNU10KL
CAPACITY PF=0.9	For Computer Load (VA/W)	1000/900	2000/1800	2000/1800	3000/2700	5000/4500	6000/5400	10000/8000
SYSTEM	Controller	Intelligent UPS with DSP controlled				Intelligent UPS with DSP control 3Level IGBT Technology		
	Technology	High Frequency Double Conversion Pure sine wave UPS, Power Factor Correction(PFC) with IGBT Technology						
INPUT	Voltage	220Vac : 200/208/220/230/240Vac Single Phase						
	Voltage Range	110-290Vac at Half Load, 160-290Vac at Full Load				120-286Vac at Half Load, 160-286Vac at Full Load		
	Frequency	50/60Hz ±6% (Auto Detect) at nominal voltage (±10% option)						
	Power Factor	PF >0.99 at Full Load, THDi <5%						
OUTPUT	Voltage	220Vac ±1% / (200, 208, 230, 240 selecting on LCD panel and software)						
	Phase	Single Phase L-N+PE						
	Frequency	Normally locked to line frequency, Free running 50Hz ±0.1% / (60Hz selecting on LCD panel and software)						
	Wave Form	Pure Sine Wave						
	Harmonic Distortion	THDv <3% at Linear Load / <5% at Non Linear Load						
	Transient Condition	±5% for 100% instantaneous load variation (Step Load)						
	Overload Capability	120% for 60 sec., 150% for 30 sec., >150% for 300ms Then Automatic Switch to Bypass				120% for 2min., 150% for 30sec., >150% for 1sec. Then Automatic Switch to Bypass		
	Crest Factor	3 : 1						
	Protection	Under/Over Voltage, Overload, Shot Circuit, Over Temperature and Low Battery Shutdown						
EFFICIENCY	DC to AC	Approximate ≥ 87%				Approximate ≥ 92%		
	AC to AC	≥ 87% at Full Linear Load				≥ 92% at Full Linear Load		
BATTERY	Type	Seal Lead Acid (Maintenance-free) Rechargeable Battery (High rate/UL 94-V0 option)						
	Capacity	3x12V7.5Ah	6x12V 7.5Ah	8x12V 7.5Ah		20x12V 7.5Ah		20x12V 9.4Ah
	Voltage	36Vdc	72Vdc	96Vdc		240Vdc		
	Standard Backup Time	15-30min (Depend on Load)						
	Extend Backup Time	15-120min Depend on Battery Unti Cap.						
	Recharge Time	3-6hours to 90% after Load Backup						
	Charger Current(A)	Standard 1.5A / Long backup 3.5A (option)				Standard 1.5A / Long backup 3.5A (option)		
TRANSFER TIME	Main Fail or Recover UPS to Bypass and vice versa	Zero Transfer Time with Static Transfer Switch (ATS-SCR)						
INDICATOR	Front Panel LED	Line, Inverter, Bypass and Battery (Mimic)						
	Front Panel LCD	Operate UPS Status, Input Voltage, Output Voltage, Frequency, Bypass, Battery Voltage, % Battery, Remaining Backup Time, %Load, VA, Watt, Temperature, Fan and UPS Fault						
PROTECTION	EMI / RFI Attenuation	>40 dB						
	Surge Protection	Indoor: UL1449 Cat A, B / IEC 61643 LPZ 3, 2 In 3kA at 8/20µsec						
	Surge Energy Dissipation	SPD 300Vac : 220 Joules in 2msec at Power 30kW I _{max} 6kA						
AUDIBLE ALARM	Multiple Tones with Reset for Silence	Mains Failure, Low Battery, Overload and UPS Fault						
INPUT PLUG	Power Cord 1.5meter	NEMA 5-15P (IEC320, GS option)				Terminal		
OUTPUT OUTLET	Tower	4xNational	4xNational + Terminal			Terminal		
COMUNICATION INTERFACE	USB Port	USB port can be connected to PC, workstation or servers for automatic unattended shutdown / RS485 / AS400 Dry Contact (option)						
	Software	UPSilon2000 supported for windows 95, 98, NT, 2000, Me, XP, Novell Netware, Linux, FreeBSD (IBM, Sun, Solaris option)						
	SNMP/HTTP Slot	Option : SNMP CARD / AS400 Dry Contact / RS485 / NB IoT, 3G/4G-IoT						
ACOUSTIC NOISE	At 1 meter	< 45 dBA				< 50 dBA		
ENVIRONMENT	Temperature	0-40°C						
	Humidity	RH 0-95% (Non-Condensing)						
DIMENSIONS (WxDxH) mm	UPS include Battery	145x350x230	190x425x330			260x560x720		
	Long Backup UPS	145x350x230	190x425x330			260x560x720		
	Battery Unit Extension (option)	Separate (UPS and Battery Unit Extension)						
WEIGHT (approximate in Kg.)	UPS include Battery	13	23	28	29	70		80
	Long Backup UPS	6.5	14	14	14	26+59		28+69
	Battery Unit Extension (option)	Depending on Battery Capacity						
CONFORMANCE	Design Regulation	TIS.1291 Part1-2553 : Safety, TIS.1291 Part2-2553 : EMC, TIS.1291 Part3-2555 : Performance Cat, C1 CE : IEC/EN 62040-1, IEC/EN 62040-2, IEC/EN 62040-3, IEC/EN 50091-1,-2, IEC/EN 55022, IEC/EN 61000						

*All above specification may be change without prior notice.

CHU-EN.BRO-49.UPS.VNU1-10K.Rev1.00/2021



ยินดีบริการ



ส่งทั่วไทย

ด้วยระบบขนส่งที่ทันสมัย



02-026-3361-115



www.saeng.com



saengonline



@saeng